



# Piccola

15  
lt/hGAS  
R600

BDC

fizz

## PICCOLA 15 FIZZ


Cooling capacity (l/h)	15
Max continuous supply (l)	2
Cold water temperature*	5 - 12 °C
Pump	Professional membrane carbonation pump
Cooling technology	Blupura Direct Chill
Tank capacity (l)	2,75
Condensation	Forced ventilation
Refrigerant gas	R600
Adjustable thermostat	Yes
Supply	230 V - 50 Hz
Compressor power	1/10 HP
Absorbed power (mod. Fizz)	190 W - 1,05 A
Working room temperature	Min 5°C - Max 35°C
Inlet water pipe	Ø1/4" (6,35 mm)
Inlet CO <sub>2</sub> pipe	Ø1/4" (6,35 mm)
Dispensing area height (mm)	281
Typology	Countertop
Net weight (kg)	16
Gross weight (kg)	17
Dimensions W x D x H (mm)	240 x 451 x 425
Packaging dimensions (mm)	500 x 266 x 489

Dispensing options	Cold still water, cold sparkling water, cold semi-sparkling water and room temperature water (mod. Fizz) or cold still water and room temperature water
Materials	ABS plastic
Alarms	No water, flooding

### OPTIONAL

Filters	UVC out
---------	---------

\* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

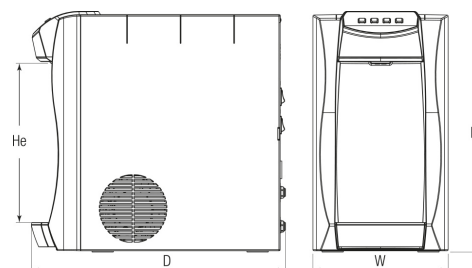

### CERTIFICATIONS

