



BLUSODA


30
l/h45
l/hstainless
STEEL

I.T.

DRY
COOLINGGAS
R290

fizz

	BLUSODA 30 FIZZ	BLUSODA 45 FIZZ
Cooling capacity (l/h)	30	45
Max continuous supply (l)	6	12
Cold water temperature*	5 - 12 °C	
Pump	Professional membrane carbonation pump	
Cooling technology	Aluminum fusion block - stainless steel coil	
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply standard model	230 V - 50 Hz	
Supply 60 Hz model	220-230 V - 50/60 Hz	
Compressor power	1/8 HP	1/5 HP
Absorbed power	280 W - 1,75 A	300 W - 1,3 A
Working room temperature	Min 16°C - Max 32°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Dispensing area height (mm)	276	329
Typology	Countertop	
Net weight (kg)	28	31
Gross weight (kg)	31	35
Dimensions W x D x H (mm)	261 x 499 x 418	318 x 499 x 470
Packaging dimensions (mm)	350 x 580 x 510	390 x 580 x 550
Dispensing options	Cold still water, cold sparkling water and room temperature water	
Materials	Parts in robust stainless steel	
Push buttons	Stainless steel push buttons	

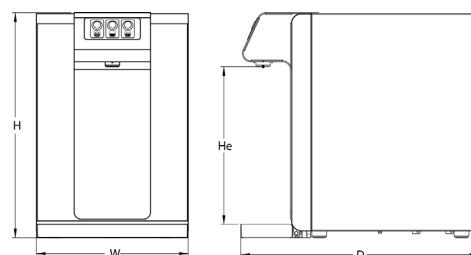

CERTIFICATIONS

CE DM 174/04



OTHER CHARACTERISTICS

Safety inlet valve included.

OPTIONAL

Water pressure reducer

CO₂ pressure reducer

Filters Activated carbon filter (inside) + UV LED OUT (inside)

Cabinet BLUSODA CABINET in stainless steel

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C