



# HYDRAZON

15  
l/hGAS  
R600

BDC

fizz

## HYDRAZON 15 FIZZ


Cooling capacity (l/h)	15
Max continuous supply (l)	2
Cold water temperature*	5 - 12 °C
Pump	Professional membrane carbonation pump
Cooling technology	Blupura Direct Chill
Tank capacity (l)	3
Condensation	Forced ventilation
Refrigerant gas	R600
Adjustable thermostat	Yes
Supply	230 V - 50 Hz
Compressor power	1/10 HP
Absorbed power (mod. Fizz)	180 W - 1 A
Working room temperature	Min 16°C - Max 32°C
Inlet water pipe	Ø8mm (5/16")
Inlet CO <sub>2</sub> pipe	Ø8mm (5/16")
Dispensing area height (mm)	280
Typology	Floor standing
Net weight max (kg)	23,3
Gross weight max (kg)	26
Dimensions W x D x H (mm)	351 x 416 x 1119,5
Packaging dimensions (mm)	400 x 435 x 1157

Dispensing options	Cold still water, cold sparkling water, cold semi-sparkling water and room temperature water (mod. Fizz) or cold still water and room temperature water
Materials	ABS plastic
Alarms	No water, flooding

### OPTIONAL

Filters	UV LED OUT
---------	------------

\* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

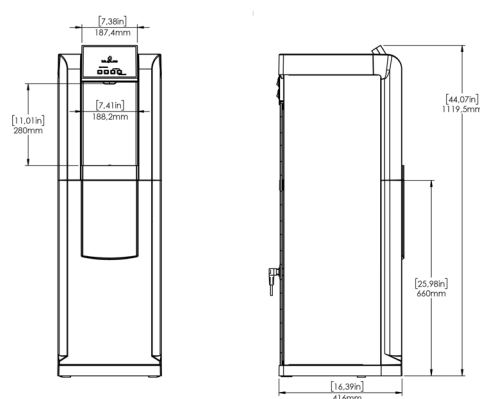

### CERTIFICATIONS

